



WINDOW INSTALLATION PROCEDURE DETAILS


JOB. TITLE:

DWG. TITLE:

WINDOW INSTALLATION PROCEDURE DETAILS PAGE 1


DWN. BY:	DES. BY:	PROJ. MGR.:
CN	RS	
PEER REVIEW:	DATE: (YY-MM-DD)	SCALE:
RS	2011.02.14	N.T.S.
CLIENT PROJ. #	WE PROJ. #	OF Z REV
_		JA
DWG #	TOLL	D 004

GE 1 SKETCH-A-B-001

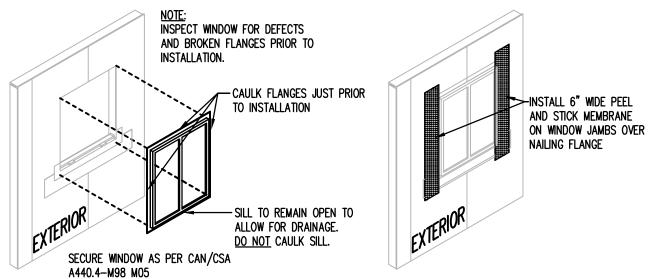

4 INSTALLATION OF WINDOW SCALE: N.T.S.


5 INSTALLATION OF JAMB MEMBRANE B-002 SCALE: N.T.S.

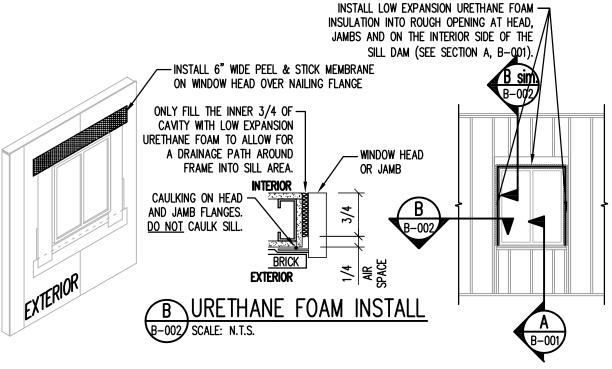


6 INSTALLATION OF HEAD MEMBRANE
B-002 SCALE: N.T.S.

7 INTERIOR WINDOW DETAIL B-002 SCALE: N.T.S.


JOB. TITLE: DWN. BY: DES. BY: PROJ. MGR.: WINDOW INSTALLATION PROCEDURE DETAILS **WILLIAMS** CN RS N195 - 3015 5 Avenue NE **ENGINEERING** Calgary, AB T2A 6T8 PEER REVIEW: DATE: (YY-MM-DD) SCALE: Bus: (403) 263-2393 RS 2011.02.14 N.T.S. Toll Free: 1-800-263-2393 Fax: (403) 262-9075 DWG. TITLE: CLIENT PROJ. # WE PROJ. # **WINDOW INSTALLATION** info@williamsengineering.com PROCEDURE DETAILS www.williamsengineering.com PAGE 2 THIS DRAWING IS NOT TO BE SCALED.

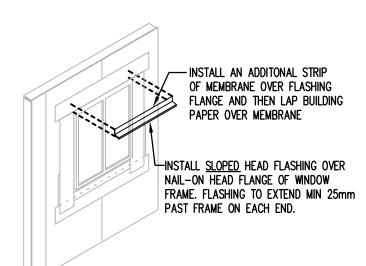

INSTALLATION OF 8 HEAD FLASHING B-003 SCALE: N.T.S.







NOTES:

SEAL ROUGH OPENING GAP WITH
 LOW-EXPANSION SPRAYFOAM INSULATION.

9 INSTALLATION OF BUILDING PAPER B-003 SCALE: N.T.S.

GENERAL NOTES:

- THIS NOTE APPLIES TO ALL NEW PEEL & STICK MEMBRANE INSTALLATIONS, AS WELL AS REPAIRS TO EXISTING PEEL & STICK MEMBRANE.
- 2. WHEN PEEL & STICK MEMBRANE IS BEING INSTALLED IN COLD WEATHER, IT IS IMPERATIVE THAT THE SUBSTRATE IS DRY, FREE OF ICE AND DEBRIS, AND THAT THE MEMBRANE IS HEATED AND ROLLED TO ENSURE A TENACIOUS BOND TO THE PRIMER AND SUBSTRATE.
- ANY SURFACE RECEIVING THE PEEL & STICK MEMBRANE, INCLUDING MEMBRANE TO SUBSTRATE AND MEMBRANE TO MEMBRANE APPLICATIONS, IS TO HAVE A SUFFICIENT AMOUNT OF PRIMER APPLIED. ALLOW PRIMER TO FLASH PRIOR TO MEMBRANE INSTALLATION.
- PRIMER IS TO BE APPLIED THE SAME DAY AS THE MEMBRANE; IF LEFT OVERNIGHT, THE SUBSTRATE IS TO BE RE-PRIMED.
- 5. ALL HORIZONTAL MEMBRANE LAPS ARE TO BE AT LEAST 4" AND ALL VERTICAL MEMBRANE LAPS ARE TO BE A MINIMUM OF 6". ALL UNAVOIDABLE REVERSE LAPS ARE TO HAVE MASTIC APPLIED TO THE TOP EDGES, AS WELL AS THE SIDE EDGES IF THE LAP IS LESS THAN 4" ON EITHER SIDE.
- 6. ANY DAMAGED MEMBRANE NEEDS TO BE ADEQUATELY REPAIRED AND RE-INSPECTED PRIOR TO BEING COVERED BY ANY FINISH.
- ALL GAPS LARGER THAN 1/2" (12.7 mm) THAT ARE TO BE COVERED WITH MEMBRANE ARE TO HAVE SUPPORTING MATERIAL (WOOD, DRYWALL, METAL) BEHIND. THIS WILL ALLOW FOR LAPS TO BE PROPERLY COMPRESSED AND SEALED.



WINDOW INSTALLATION PROCEDURE DETAILS

JOB. TITLE:

DWG. TITLE:

WNDOW INSTALLATION PROCEDURE DETAILS PAGE 3

DWN. BY:	DES. BY:	PROJ. MGR.:	
CN	RS		
PEER REVIEW:	DATE: (YY-MM-DD)	SCALE:	
RS	2011.02.14	N.T.S.	
CLIENT PROJ. #	WE PROJ. #	OF _ REV_#	
-		3 A	

SKETCH-A-B-003